

# Sludge storage silo



*Short loading procedure through high discharge capacity (typically 27 t in 25 min.)*


*Level and weight indication with telemetry option*

*Automated via local control panel*

*Semi-mobil*

*Fully enclosed, reducing odour potential*

*Robust and reliable design*

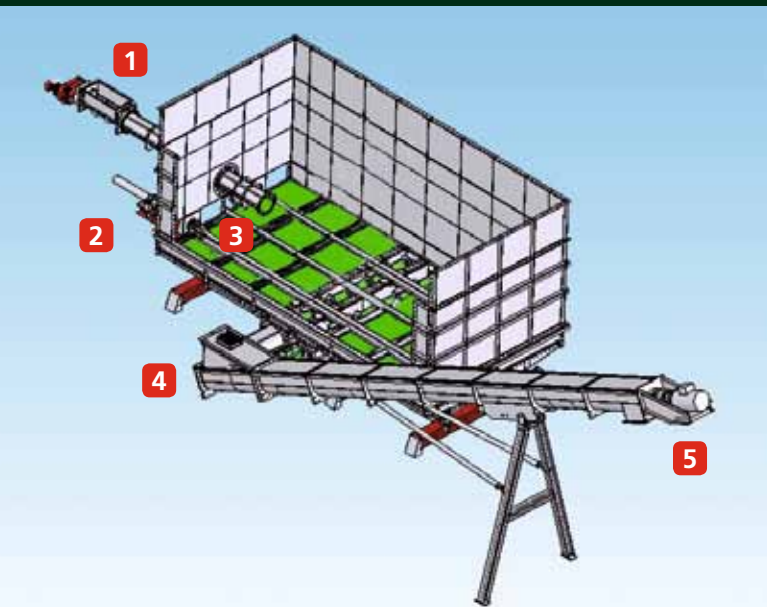

- 1 Charge screw
- 2 Hydraulic cylinders/rams
- 3 Push floor on low friction plastic layer
- 4 Outlet screw(s)
- 5 Loading screw

## Setup of dewatering equipment can be flexible



Press screw feeding



Free discharge

## Optimise Storage and logistics

One sludge silo provides cost effective storage equivalent to 4 rollon-rolloff skips. Increase control and fast turnaround times enable transport managers to optimize their fleet.



before



after

subject of technical changes, 03/11

EIN UNTERNEHMEN  
DER HUNING GRUPPE

HUNING Maschinenbau GmbH • Wellingholzhausener Straße 6, D-49324 Melle  
Tel. +49 (0) 54 22/6 08-2 60 • Fax +49 (0) 54 22/6 08-2 63  
info@huning-maschinenbau.de • www.huning-maschinenbau.de